

Evaluation Kit for DF (24-pin PSOP)

INTRODUCTION


The EK51 evaluation kit provides a fast and easy breadboard solution for all devices in Apex Precision Power's PSOP1 package (24 PIN PSOP). The EK51 includes the EVAL43 board shown in Figure 1, as well as the universal EVAL36 board. The combination of the two boards provides a large area for breadboard circuit space while also providing an effective method of thermal management of the surface mount package. The device under evaluation is surface mounted directly to the EVAL43 PC board which provides a foil footprint area the size of the heat slug. This foil heat slug connection area consists of plated through thermal vias. The thermal vias offer a cost-effective way to decrease the thermal resistance between one side of the PC board which allows for the direct mounting of a heat sink or heat sink surface mount fan on the back side of the PC board.

PARTS LIST

Part#	Description	Qty
EVAL36	Universal PC Board, Apex Precision Power	1
EVAL43	PC Board, PSOP1, Apex Precision Power	1
TSM-116-01-T-SV	Terminal Strip, 16pin, Samtec	2
SSW-116-01-T-S	Socket Strip, 16pin, Samtec	2
OX7R105KWN	Cap, 200V, 1μF, Ceramic	4
*ERJ-6GEYOR00V	Res, 0.0Ω, 0805SMD, Panasonic	4
*AVS336M2AG24T	Cap, 100V, 33μF, CDE	4
*031606	Heat Sink w/ Fan, 3.4°C/W, AAVID	1
or		
*031613	Heat Sink, 11.0°C/W, AAVID	1

* Parts not supplied. Parts are application dependent. Suggested part numbers are provided.

Figure 1: EVAL 43

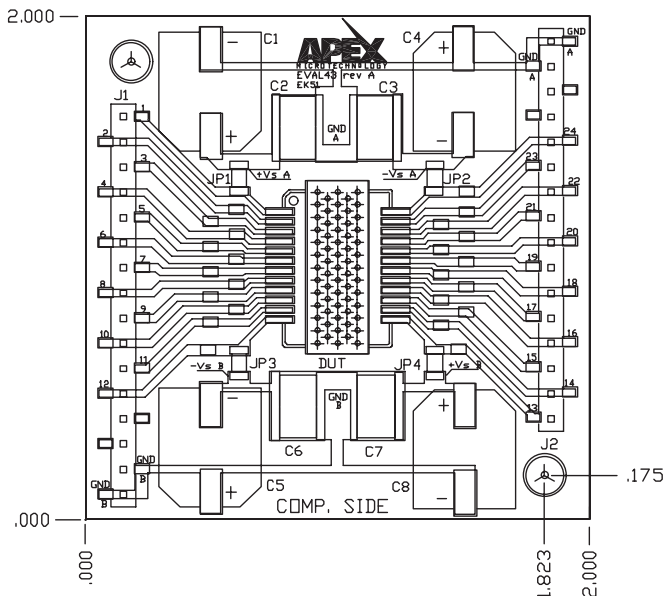

ASSEMBLY

The PSOP1 should be assembled to the EVAL43 PC board using surface mount processes. Solder paste may be dispensed or screen-printed on the DUT pads as well as the foil heat slug pad. The heat slug on the bottom surface of the PSOP1 provides maximum heat dissipation capabilities when soldered to the PCB foil footprint area. However, for prototype purposes, the tab can be thermally connected to the PCB foil area using thermal grease.

If soldering the heat slug, ideally the PSOP1 should be soldered to the PCB using a solder reflow furnace. If a reflow furnace is not available, a heat plate capable of solder reflow temperatures may be used. Otherwise, the leads may be carefully soldered individually to the PCB with a thin tip soldering iron. However, in this case, the use of thermal grease under the heat tab is recommended instead of solder for thermal connection through the thermal vias.

The kit comes with ceramic bypass capacitors, which should be soldered on the space provided on the EVAL43 board. Also, space is provided for the appropriate electrolytic by-pass capacitors. Although these capacitors are not provided in the kit, a recommended capacitor is listed for 100V applications. For higher voltage applications, a larger electrolytic capacitor can be mounted on the EVAL36 board.

The EVAL43 is a generic evaluation board for the PSOP1. Jumpers are required to make appropriate connection to +Vs, -Vs and ground. When applicable, surface mount 0805 0Ω resistors can be used in the locations provided.


Once all the surface mount components are installed, the heat sink can then be mounted to the back of the PC board. High thermal conductive grease should be used when mounting the heat sink to the PC board. Note: A heat sink is not supplied with the kit, but several options are listed which are produced by AAVID Thermal Product, Inc.

Review Figure 2 on the next page for all other assemblies needed to construct this evaluation kit.

BEFORE YOU GET STARTED

- * All Apex Precision Power amplifiers should be handled using proper ESD precautions.
- * Always provide the appropriate heat sinking.
- * Always use adequate power supply bypass capacitors.
- * Do not change connections while the circuit is powered.
- * Initially set all power supplies to the minimum operating levels allowed in the device data sheet.
- * Check for oscillations.

Figure 2: EVAL36

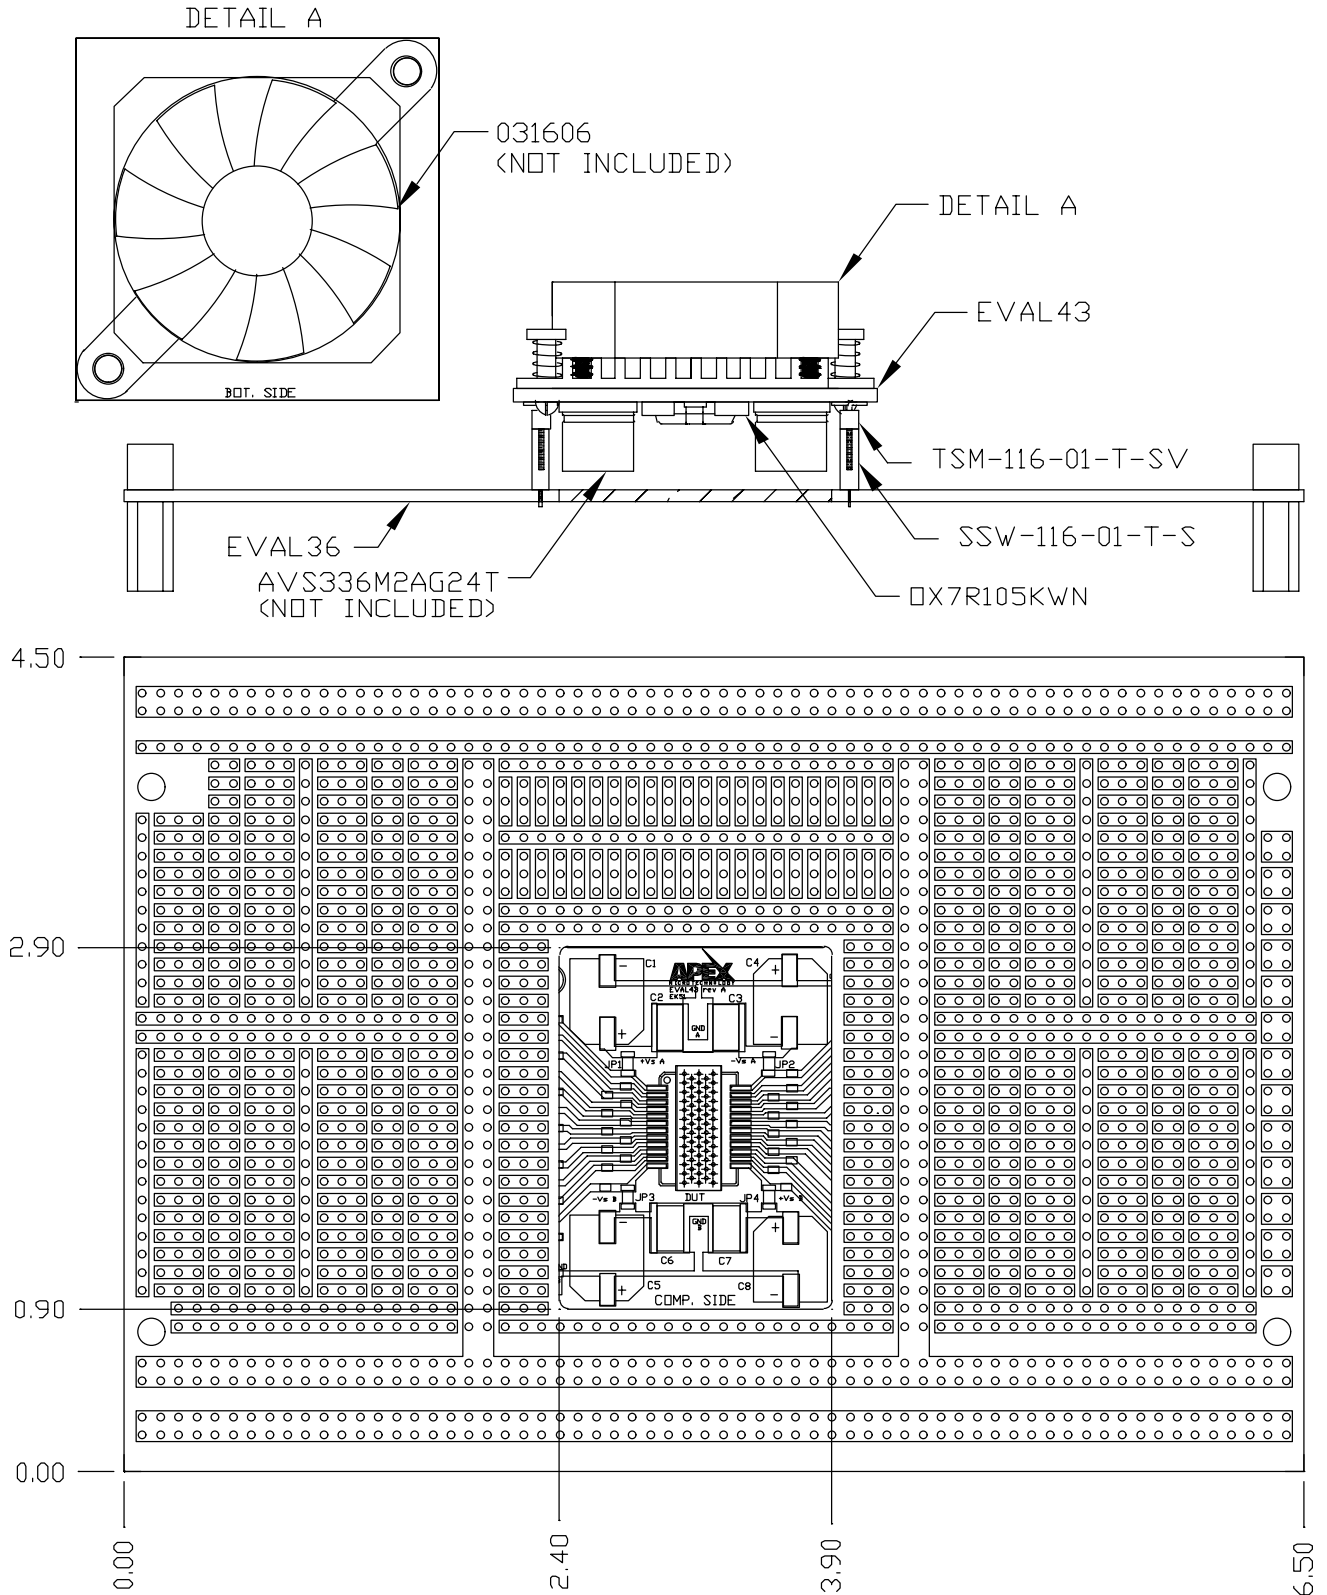



CONTACTING CIRRUS LOGIC SUPPORT

For all Apex Precision Power product questions and inquiries, call toll free 800-546-2739 in North America.

For inquiries via email, please contact apex.support@cirrus.com.

International customers can also request support by contacting their local Cirrus Logic Sales Representative.

To find the one nearest to you, go to www.cirrus.com

IMPORTANT NOTICE

Cirrus Logic, Inc. and its subsidiaries ("Cirrus") believe that the information contained in this document is accurate and reliable. However, the information is subject to change without notice and is provided "AS IS" without warranty of any kind (express or implied). Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, indemnification, and limitation of liability. No responsibility is assumed by Cirrus for the use of this information, including use of this information as the basis for manufacture or sale of any items, or for infringement of patents or other rights of third parties. This document is the property of Cirrus and by furnishing this information, Cirrus grants no license, express or implied under any patents, mask work rights, copyrights, trademarks, trade secrets or other intellectual property rights. Cirrus owns the copyrights associated with the information contained herein and gives consent for copies to be made of the information only for use within your organization with respect to Cirrus integrated circuits or other products of Cirrus. This consent does not extend to other copying such as copying for general distribution, advertising or promotional purposes, or for creating any work for resale.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). CIRRUS PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED TO BE SUITABLE FOR USE IN PRODUCTS SURGICALLY IMPLANTED INTO THE BODY, AUTOMOTIVE SAFETY OR SECURITY DEVICES, LIFE SUPPORT PRODUCTS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF CIRRUS PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK AND CIRRUS DISCLAIMS AND MAKES NO WARRANTY, EXPRESS, STATUTORY OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE, WITH REGARD TO ANY CIRRUS PRODUCT THAT IS USED IN SUCH A MANNER. IF THE CUSTOMER OR CUSTOMER'S CUSTOMER USES OR PERMITS THE USE OF CIRRUS PRODUCTS IN CRITICAL APPLICATIONS, CUSTOMER AGREES, BY SUCH USE, TO FULLY INDEMNIFY CIRRUS, ITS OFFICERS, DIRECTORS, EMPLOYEES, DISTRIBUTORS AND OTHER AGENTS FROM ANY AND ALL LIABILITY, INCLUDING ATTORNEYS' FEES AND COSTS, THAT MAY RESULT FROM OR ARISE IN CONNECTION WITH THESE USES.

Cirrus Logic, Cirrus, and the Cirrus Logic logo designs, Apex Precision Power, Apex and the Apex Precision Power logo designs are trademarks of Cirrus Logic, Inc. All other brand and product names in this document may be trademarks or service marks of their respective owners.