


LOC	DIST	REVISIONS				
CM	0	REV	DESCRIPTION	DATE	BY	APPV
		B	REVISED PER ECO-12-007810	28JUL12	KH	SM

- 1 UNIT ACCEPTS 1.14[.045] SQUARE OR ROUND POST.
- 2 UNIT ACCEPTS STANDARD SL-156 CONTACTS.
- 3 UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
- 4 IDENTIFICATION NUMBER FOR ALL POSITIONS, OR FOR POSITION 1 ONLY, WILL BE LOCATED AS SHOWN.
- 5 OPTIONAL CONSTRUCTION, BOTH ENDS.
- 6 DIMENSIONS IN BRACKETS ARE IN INCHES.

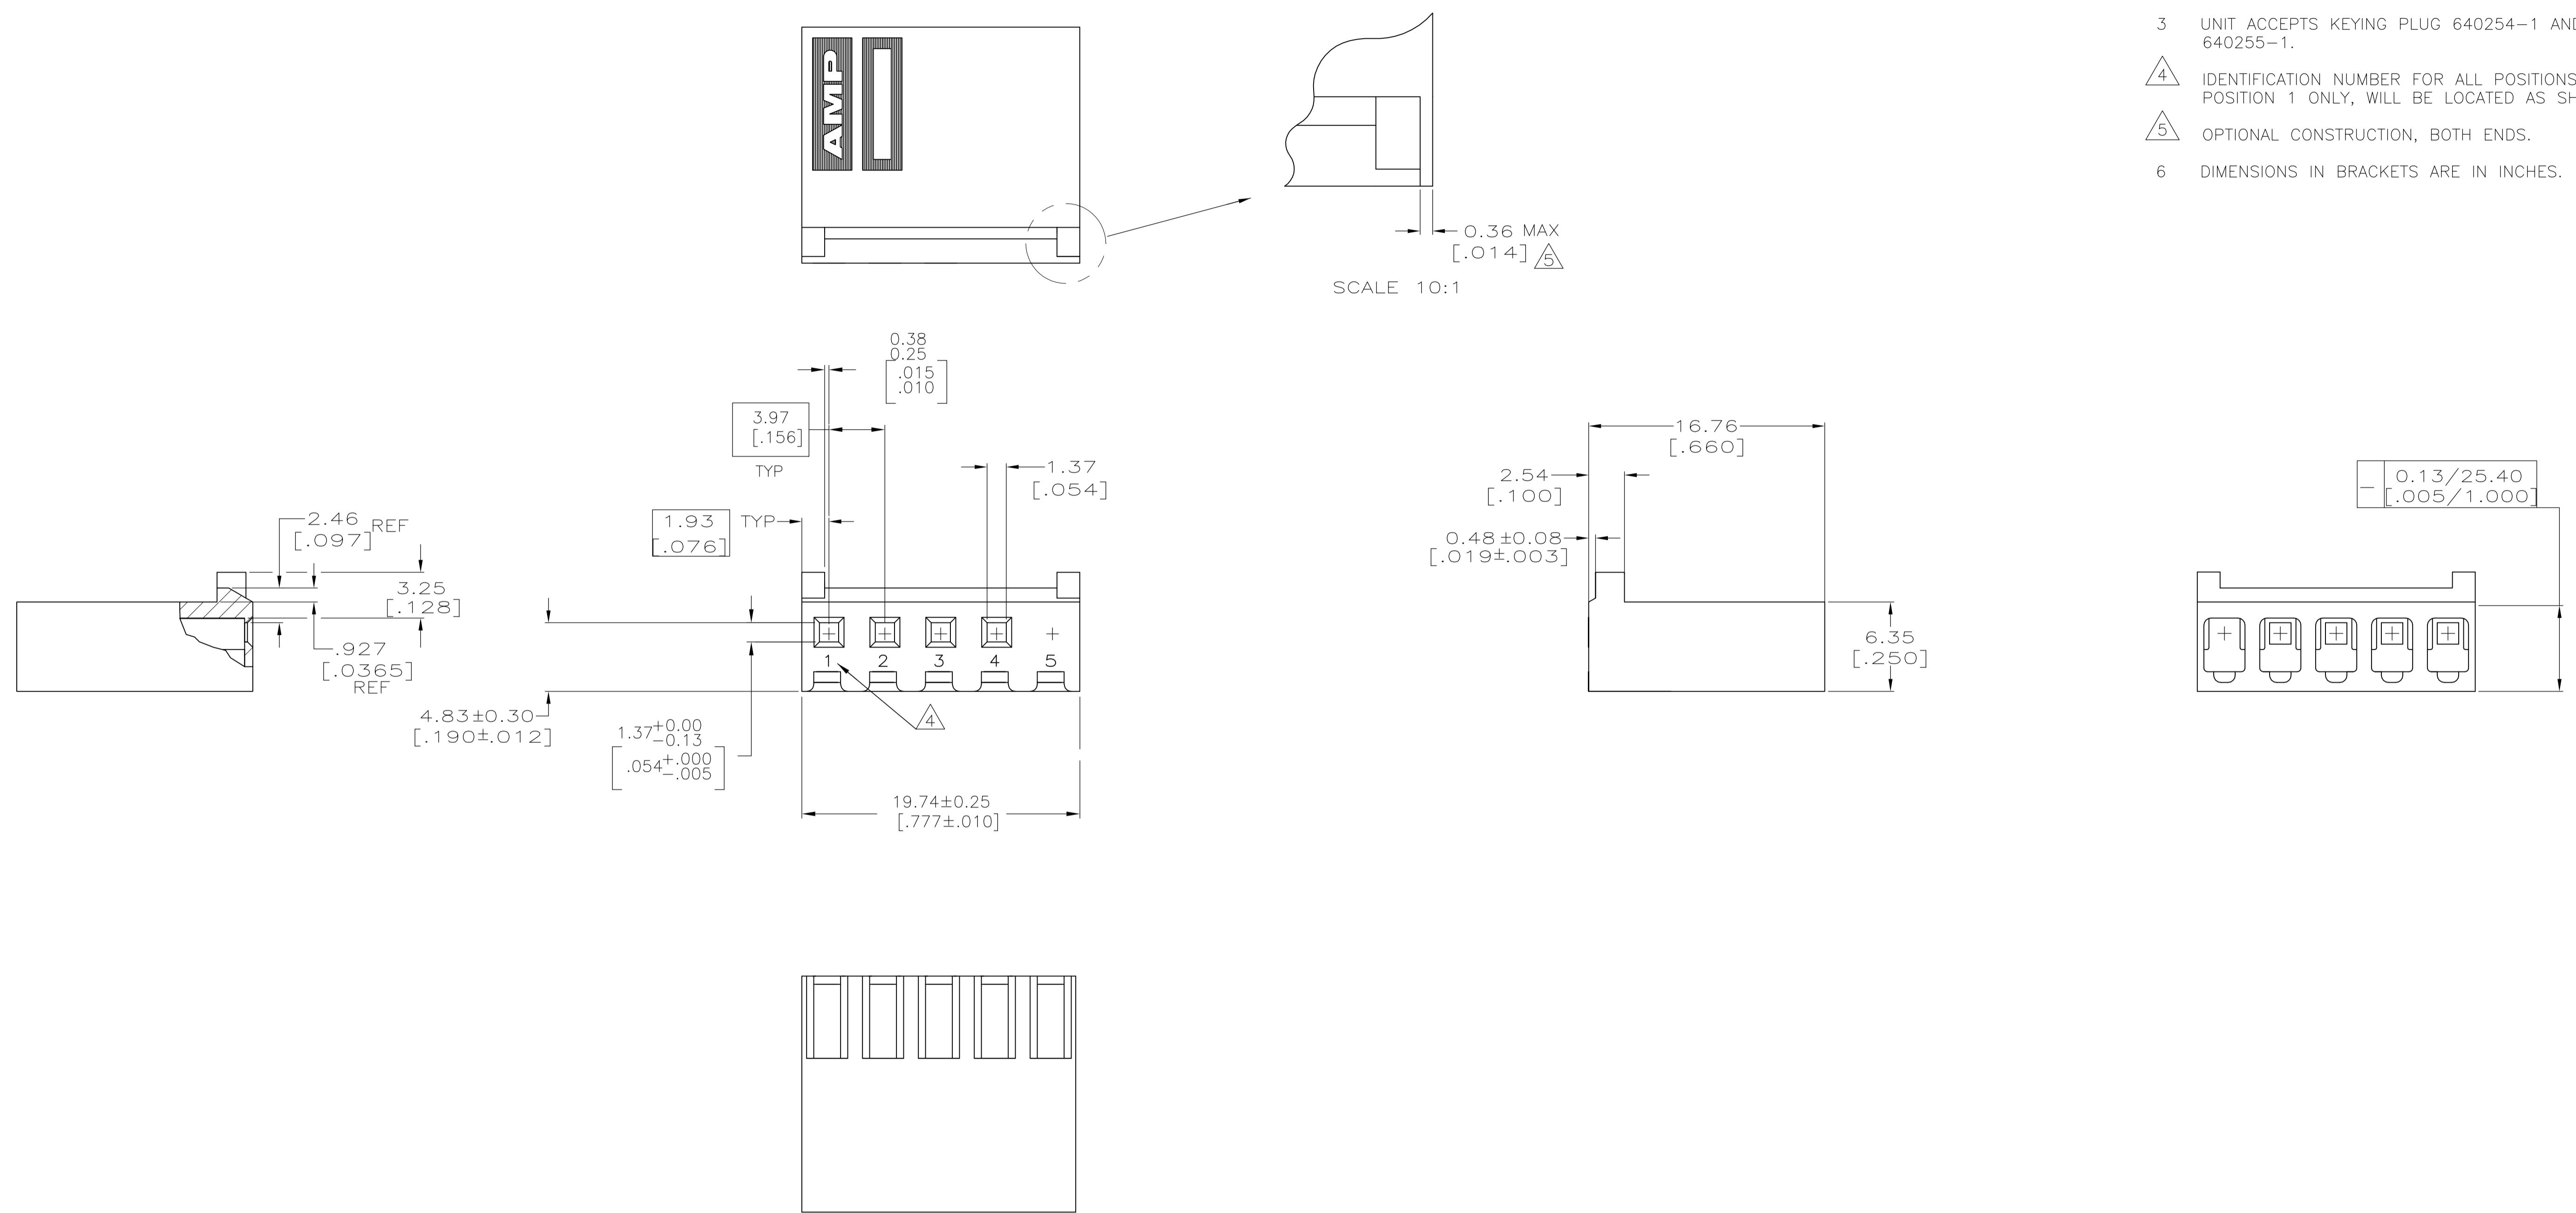

5	647346-5
NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: K. WHITAKER 04NOV2005	TE Connectivity
DIMENSIONS: mm [INCHES]		CHK: D. ROSSI 04NOV2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV: D. ROSSI 04NOV2005	NAME: HOUSING WITH LOCKING RAMP AND POLARIZING TABS, POSITION 5 BLOCKED, SL-156
0. PLC	± -	PRODUCT SPEC	APPLICATION SPEC
1. PLC	± -	SIZE	CAGE CODE
2. PLC	± -	DRAWING NO	RESTRICTED TO
3. PLC	± 0.13 [.005]	WEIGHT	A1 00779
4. PLC	± -	CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV B
ANGLES	± -		
MATERIAL: NYLON,UL 94V-0	FINISH: -		

