


**Material**

Solid PIN: Brass(CuZn)  
 Surface of solder tail: Matte Tin plated. Ⓜ  
 Insulator (housing): Thermoplastic (UL94V-0)

**Electrical cULus**

Voltage rating: 300V  
 Current rating: 10A  
 Withstanding Voltage: 1.6KV  
 Operating temperature: -40°C to +115°C  
 Soldering temperature: 250°C±10°C/5 Sec  
 Safety Approval: us

**P.C.B. LAYOUT**

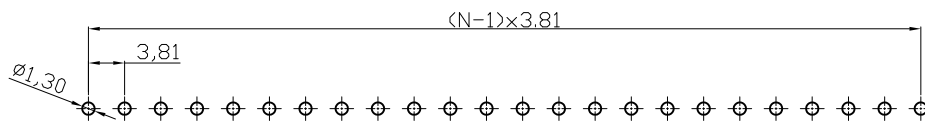

**RoHS compliant**

Unit: mm

Scale	Free						Date	Name	Customer-No.	
TOLERANCE						Drawn	29.07.2009	Dean	ASSMANN WSW-No. <b>A-TB381-OPxx</b>	
X.	±0.50					Approved	23.07.2014	Amy		
X.X	±0.30									
X.XX	±0.10									
DIM	TOL	Ⓜ	Update the plating to Matte Tin	23.07.2014	Amy			Drawing-No.	ASS 3597 CO rev02	
		Ⓜ	Drawn	29.07.2009	Dean			Replace		Sheet
X.°	±1°	Ⓜ								
Angle	TOL	Id.	Modification	Date	Name					