


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

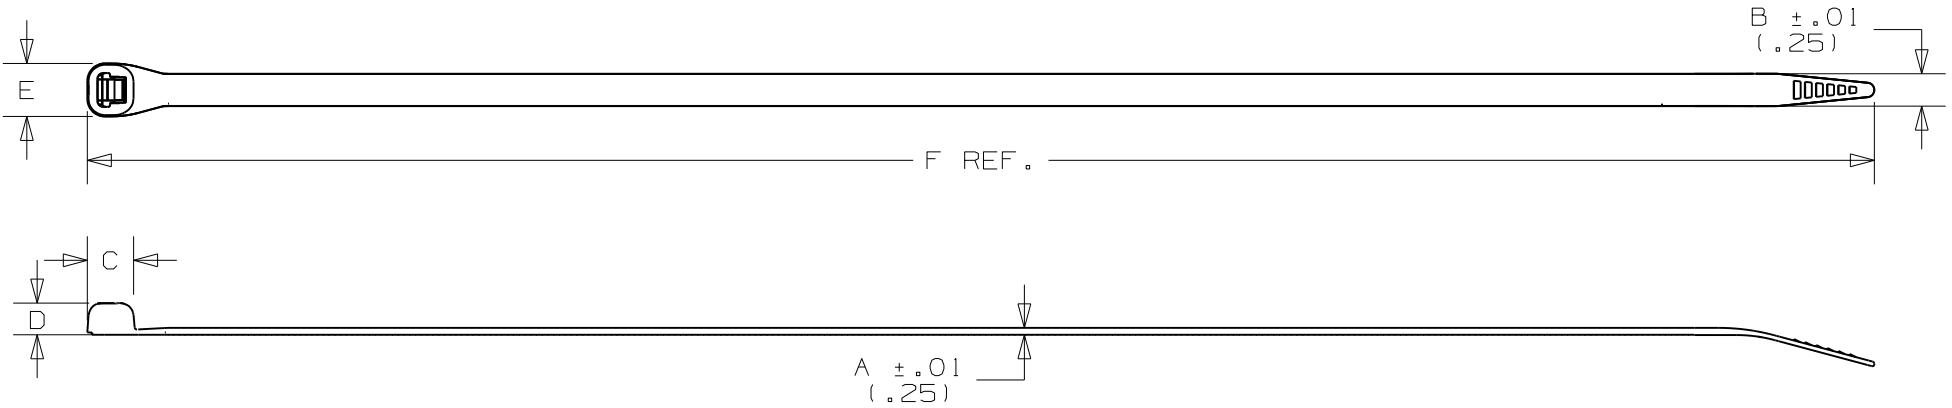

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs (g) 100 pcs
	MIN. in (mm)	MAX. in (mm)									
SG100M	.03 (.8)	.9 (23)	.038 (.97)	.118 (3.0)	.173 (4.4)	.154 (3.9)	.209 (5.3)	4.2 (105.9)	18 (80)	MINIATURE	.066 (30)
SG150I	.03 (.8)	1.5 (38)	.040 (1.0)	.168 (4.3)	.220 (5.6)	.179 (4.5)	.306 (7.8)	6.2 (157.0)	40 (178)	INTERMEDIATE	.145 (66)

NOTE:

1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE & PART COLOR.

DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

SUPER-GRIP CABLE TIES

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ± .020(.5)
(.XX) ±.02(.5) ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY JABO

MAT'L:

SCALE NONE

DATE 4/28/05

NYLON 6.6

DRAWING NO. SS-27441

DWG A

CHK'D BOB K

SHEET 1 OF 3

SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
1	7/5/07	ERW		CORRECTED SG100M MAX. BUNDLE DIAMETER FROM 1.0 (25mm) TO .9 (23mm).	27441		1	